


Mobile Concrete Block Machine [ egg layer type ]

# EUROBLOCK 12

WITH VIBRATING PLATE [OPTIONALY]

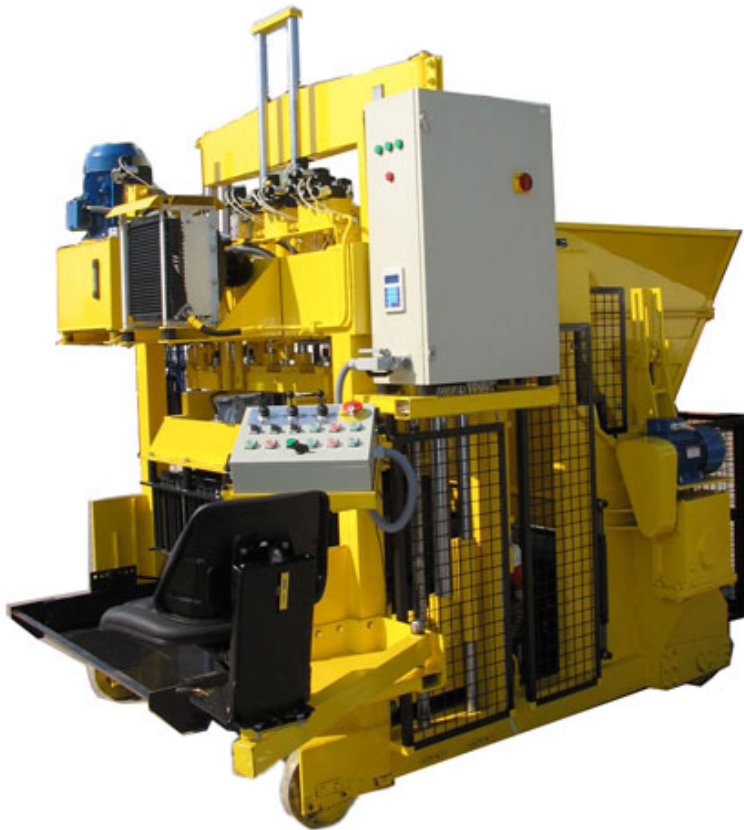

Available in manual, semi and fully automatic version. Machine can be equipped with hydraulic oil cooler. Vibration system is compatible with Zenith 913 SVS, and original zenith vibrators and moulds (SVS size) can be attached on it. Vibration table for production of paving stones, curbstones etc. is fitted on machine frame, and also 500 mm max block height (floor production) can be reached if customer request. Hydraulic components are in CETOP standard. Machine frame is much stronger than in COMPACT 1200 and. Machine is equipped with hydraulic brake system for countermould and wheel (brake on wheels make machine stable during mould filling process).

### Features

Hopper volume	1000 l
Max mould width	1290 mm
Max. Mould depth	1130 mm
Min. Production height	175 mm
Max. Production height	330 mm (500 mm option possible – no charge)
Weight with mould and vibrators	5400 kg

### Production

For blocks 400 x 200 x 200 mm is 1200 blocks/h  
10.000 blocks for 8 hour shift. Theoretically for 24 hour/ 30.000 blocks.

### Dimensions

Total length	3300 mm
Total height max	3000 mm
Total height min	2550 mm
Total width	2350 mm

### Number of vibrators

Max. 4 mould vibrators	48 kN
Max. 2 tamper head vibrators	20 kN

### Power supply

Power consumption max.	17,5 kW
------------------------	---------







# EUROBLOCK 12

WITH SYSTEM VIBRATING PLATE



# EUROBLOCK 12

WITH SYSTEM VIBRATING PLATE





# EUROBLOCK 12

WITH SYSTEM VIBRATING PLATE